


# COLD SHRINK TAPE ASB

**ASB** is a coiling, self-vulcanizing tape for using inside and outside. The tape is particularly appropriate for sealing ducts. The tape is also suitable for sealing seams and cracks in gutters, dome lights etc. The tape can be painted over for aesthetic reasons.

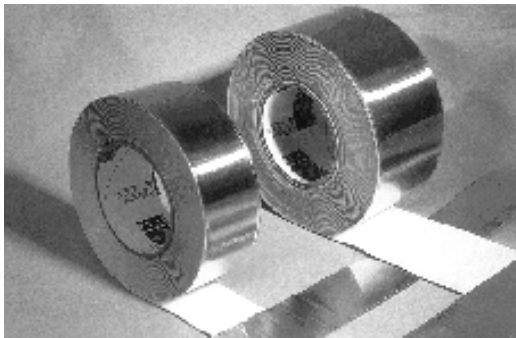

## CONSTRUCTION

The tape has been built up out of 2 layers. The outer layer is an aluminium- foil with a thickness of 40 microns and provides adhesion and good processing. The inner layer consists of a butyl rubber sealing coat, adhering to each surface. The sealing coat has been covered with a polyethylene layer. The total thickness is 0.95mm +/- 3%.

2.1

## DELIVERY PROGRAM

**ASB**-tape is available in three different standard widths: 050, 075 and 100mm. The standard length is 15m per roll. Ordering code: **ASB7{width}**

## OPERATING TEMPERATURE.

**ASB**-tape is suitable for applications within the following temperature range: -20 up to +70 °C.

## OPERATING PRESSURE

**ASB**-tape is suitable for processing up to an over pressure of +2000 Pa.

## ADHESION

The product adheres completely within 24 hours. The adhesion to galvanized steel is 2.0 kg/cm if the surface is dry, fat-free and dust-free. The adhesion will be most effective if the tape is pressed firmly.

## FIRE RESISTANCE

After testing the tape has been classified into class B2, according to DIN 4102.

## STORAGE

**ASB** has a lifespan of two years if the packaging is dry and sealed.

## USERS GUIDE

*THE SURFACE HAS TO BE CLEAN, DRY AND FAT-FREE.*

The application temperature must be higher than 5°C. Particularly when the tape is going to be attached at a lower temperature it should be pressed firmly.

Apply on round and square ducts. If the duct has a diameter >250mm, some clearance between the ducts can be expected due to the tolerance; we advice to use only **ASB** width 75mm or wider. Use an overlap of 5cm or larger.

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.

Version 2004 [WWW.DECINTERNATIONAL.COM](http://WWW.DECINTERNATIONAL.COM)