

MULTIBAND/MULTICLAMPS

The **MULTIBAND/MULTICLAMPS** are suitable for mounting all types of flexible connections. The combination **MULTIBAND/MULTICLAMP** enables you to making a clamp with diameters required at the work station.

The **MULTIBAND/MULTICLAMP** is particularly suitable for maintenance purposes.



CONSTRUCTION

The **MULTIBAND** has been constructed according to the DIN 3017 standard. The band has been manufactured out of stainless steel (UNI x8Cr17-DIN 1.4016(W2)-AISI 430) and the thickness is 0.6mm.


The clamps, **MULTICLAMPS**, have been manufactured out of galvanized steel.

INSTRUCTIONS FOR USE

To obtain the **MULTIBAND** in the diameter required:

1. Extract the strip from the bos and count the intervals between the arrow indicators (see diameter extension table)
2. Cut the strip and bend 2 cm (3/4") in the direction of the arrow
3. Fasten the strip to the traction device and press the bend

The **MULTIBAND** is ready for installation

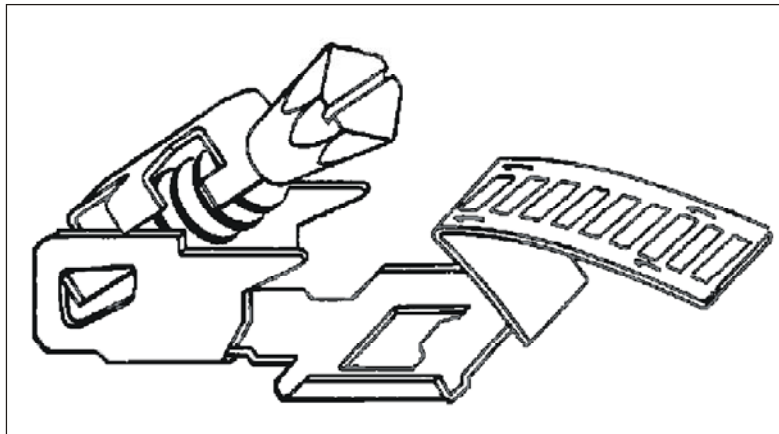

DELIVERY PROGRAM

MULTIBAND is available in cartons containing 10 rolls. The diameter range is variable. The length of the **MULTIBAND** is 30m and the width is 9mm. The

MULTICLAMPS are suitable for fastening on the **MULTIBAND**.

MULTICLAMPS are delivered in boxes, containing 10 cartons with 50 pieces each.

Ordering code for **MULTIBAND**: QIPBAND

Ordering code for **MULTICLAMPS**: QIPCLAMP

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.

Version 2003. WWW.DECINTERNATIONAL.COM