


NYLON QUICK CLAMPS

The **NYLON QUICK CLAMPS** are suitable for all kinds of flexible connections.

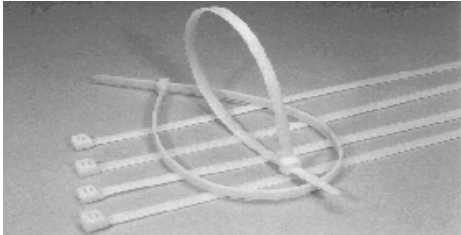


CONSTRUCTION

The **NYLON QUICK CLAMPS** are manufactured out of nylon 66. Production according to the Military Specification: MIL-S 23190E.

NYLON QUICK CLAMPS are available in different standard sizes, the range is 2.5 up to and including 9.0mm. The diameter range is 0 up to 229mm.

OPERATING TEMPERATURE

NYLON QUICK CLAMPS are suitable for applications within the following temperature range: -40 up to +85°C

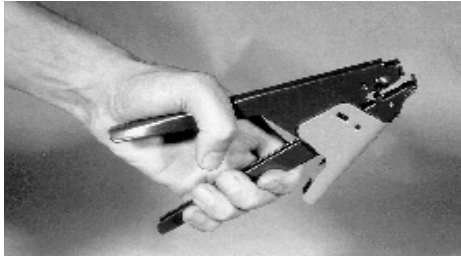

DEC delivers assembly pliers particularly for the **NYLON QUICK CLAMPS**. The assembly pliers have a long lifespan and simplifies the application of the **NYLON QUICK CLAMPS**. They are sold by the piece.

ORDERING INFORMATION

Ordering code:

NYLON QUICK CLAMP: QCL(length in mm)/{width}

QUICK CLAMP TOOL: QCLOOTA

Summary of the delivery program:

Ordering code	Diameter range (mm) min-gross/net ¹⁾	Length x Width (mm)
QCL100/2.5	0 - 30 / 22.6	2.5 x 100
QCL160/2.5	0 - 50 / 41.4	2.5 x 165
QCL200	0 - 50 / 54.1	4.8 x 203
QCL200/2.5	0 - 60 / 52.5	2.5 x 203
QCL300	0 - 75 / 85.9	4.8 x 300
QCL370	0 - 110 / 106.6	4.8 x 368
QCL450	0 - 127 / 127.3	9.0 x 450
QCL530	0 - 140 / 152.3	9.0 x 550
QCL780	0 - 229 / 234.0	9.0 x 812

1) The diameter range has been stated as a minimum diameter, which is 0 millimeters everywhere. The gross diameter has also been given. The net diameter is the diameter, which, in practice, appears to be the maximum diameter.

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.

Version 2006 WWW.DECINTERNATIONAL.COM