



WINDOWSILL GRILLE Z-300

Installation dimensions

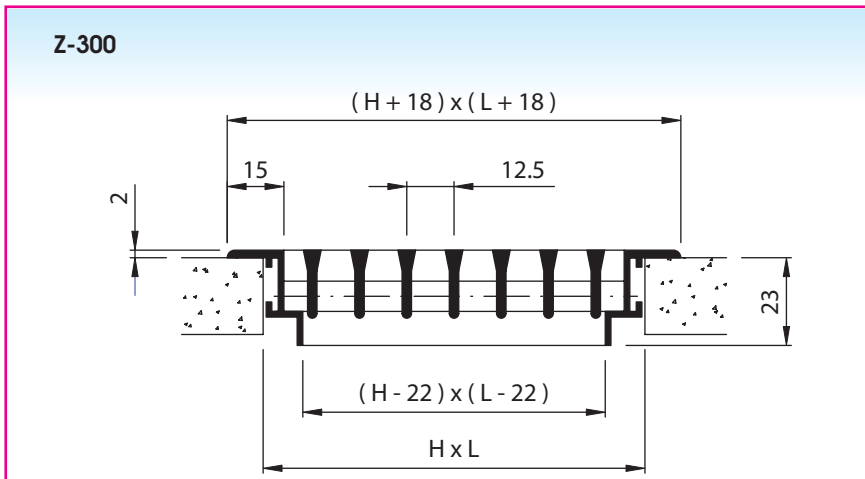

L: nominal length (mm)
H: nominal height (mm)
All dimensions in mm.

Fast selection diagram

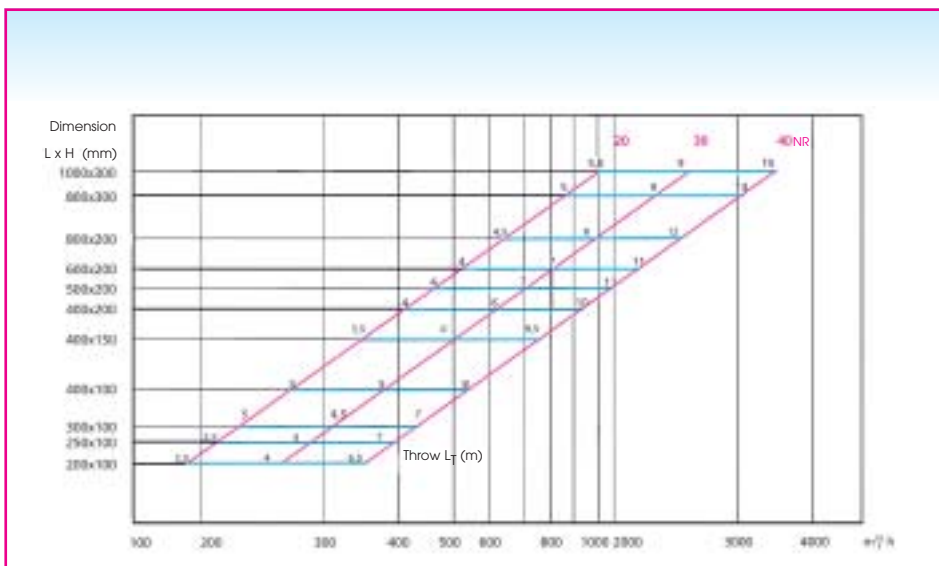

Throw factor is based on a v_R of 0,17 m/s in the occupied zone.
For a detailed selection and other dimensions, see p. 1 230.
Valid only for supply, see diagram p. 1 230 for exhaust.



Application

The grille type Z-300 is used for the supply and exhaust of cooled or heated air in facilities such as offices, shops, ...
The grille can be mounted in a windowsill where an austere aesthetic construction is desired.
This grille can not be used for floor mounting.

Technical information

Characteristics :

- straight bars or 15° deflection
- margin = 15 mm
- bars on 12,5 mm or 16^{2/3} mm centres
- available in multiples of 1 mm in length and 12,5 mm in height
min L=100 mm, max L=2000 mm
min H=50 mm, max H=300 mm
- linear grilles (=grille in multiple pieces, consisting of intermediate and end pieces)
- ZA300: removable core
- ZB300: fixed core

Construction :

- margin and bars in extruded aluminium
- finish satin anodised

Specifications description

Example :

Aluminium grille with fixed horizontal straight bars for windowsill mounting. The grille is standard natural tone anodised.

Type : ZA300

nom. dim. (LxH) ... x ... mm

Fixing

- loose mounting

Bar types

Deflection 0°



Deflection 15°



How to order

ZA300, dimension 600 x 200 mm

Z	A	3	0	0	-	-	0	6	0	0	0	2	0	0
						L				H				

- 0 : grille with bars on 12,5 mm centres
- 2 : grille with bars, deflection 15° and 12,5 mm centres
- 4 : grille with bars on 16^{2/3} centres
- 6 : grille with bars, deflection 15° and bars on 16^{2/3} centres

- A : margin 15 mm, removable core
- B : margin 15 mm, fixed core