


CIRCULAR GRILLE WITH BARS CB400

Installation dimensions



Size	$\varnothing N$	$\varnothing A$
100	100	160
125	125	160
160	160	200

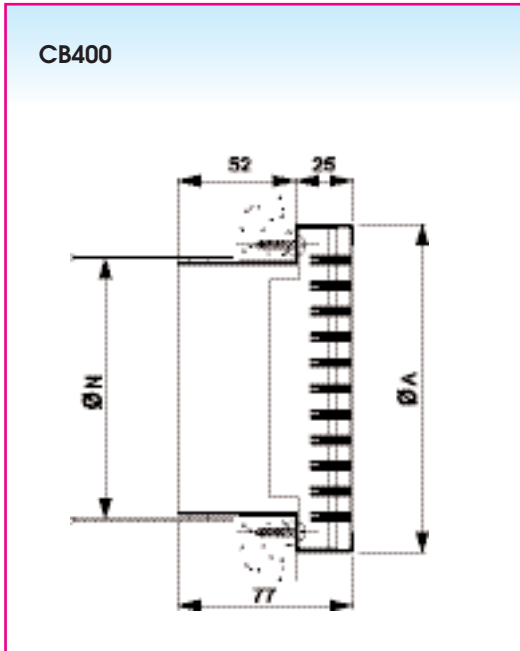

Application

The circular grille type CB400 is used for the supply and exhaust of cooled and heated air, particularly in smaller spaces such as wash-rooms, toilets, bathrooms or kitchen within housing, restaurants, retail or commercial uses.

The grille can be mounted directly on a circular duct or fixed to the wall with screws.

Technical information

Characteristics :

- straight bars (CB400) or with 15° deflection (CB420)
- the grille core can be rotated to provide directional control of the air flow (CB420)
- bars on 12,5 mm centres
- available in 3 sizes: 100, 125 and 160 mm diameter

Construction :

- bars out of extruded aluminium, satin anodised
- grille housing in mill finish aluminium
- painted in RAL colour on request
- foam sealing strip

Specifications description

Example :

Aluminium circular grille with bars at 15° deflection for mounting directly on a circular duct with screw fixing to wall. The grille satin anodised.

Type : CB420
size mm

Fixing

The grille will push-fit into circular ducts. The grille can be secured to the wall by screw fixing through the back of the grille housing after removing the push-fit core retaining bezel.

How to order

CB420, size 125 mm with a deflection of 15°.

C	B	4	2	0	-	-	0	1	2	5	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

size

- 0 : grille with straight bars
- 2 : grille with bars 15° deflection

Possible deliveries

CB400

Supply and exhaust grille with fixed straight bars.

CB420

Supply and exhaust grille with bars with 15° deflection