

LOCAL EXTRACTOR

MRX


Local extractor with friction joint. Great flexibility and low pressure drop.

MRX is a local extractor designed for use in worksites that require more flexibility and low pressure drop at the same time.

The outside joints are easy to adjust. The extractor is also easily dismantled which facilitates cleaning the inside of the suction duct. Should it be necessary, the complete extractor can be dismantled.

The standard MRX is supplied with a manual damper. White epoxy coated metal hood 250 mm or plexiglas dome hood 350 mm are available as accessories.


MRX is designed for table, ceiling or wall mounting.

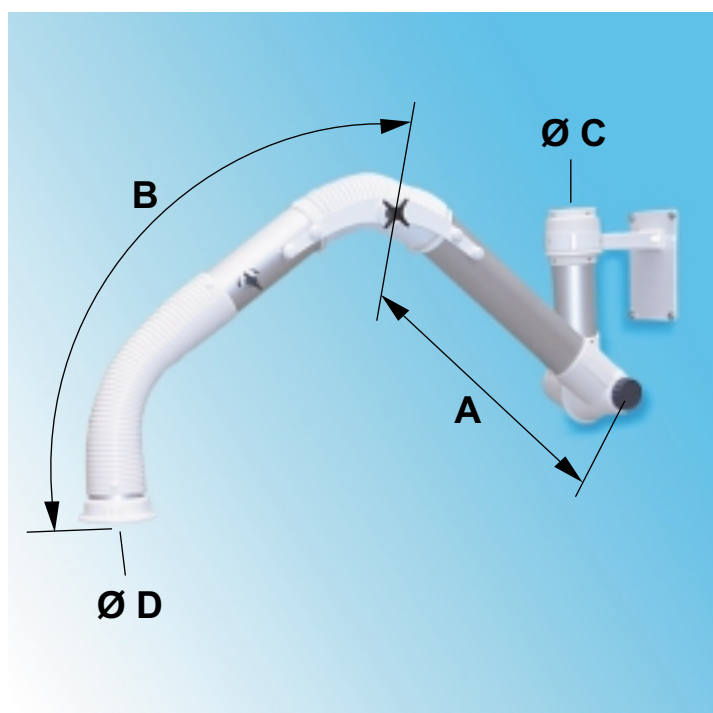

Designation	A (mm)	B (mm)	Ø C (mm)	Ø D (mm)	Total length
MRX 1200-75B	580	670	98,5	75	1250
MRX 1200-75V	580	670	98,5	75	1250
MRX 1200-75T	580	670	98,5	75	1250

B=bench mounting T=Ceiling mounting V=Wall mounting

Ceiling brackets are available in 4 standard lengths: 250, 500, 750 and 1000 mm

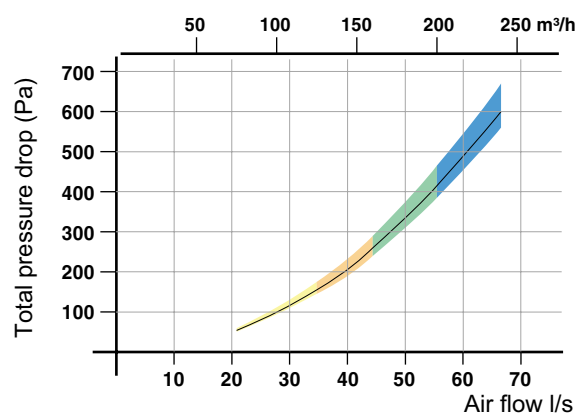

- (yellow) 5-8 m/s
- (orange) 8-10 m/s
- (green) 10-12 m/s
- (blue) 12-15 m/s

Fumex also offers a range of fans, accessories and automatic control devices for our local extractors

FUMEX®
LOCAL EXTRACTOR
Pure advantage

Verkstadsvägen 2, 931 61 SKELLEFTEÅ, Sweden Tel.Int. +46 910-361 80, Fax.Int. +46 910-130 22
www.fumex.se info@fumex.se