


DUCT TAPE

DUCT TAPE is appropriate to sealing round ducts. It is particularly suitable for applications in mechanical ventilation systems.

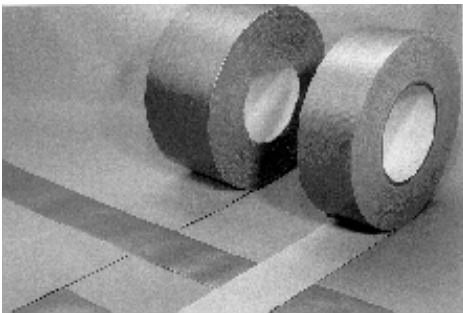

CONSTRUCTION

DUCT-TAPE is a linnen-tape, a composition of polyethylene and plastic, provided with a natural rubber sealing coat layer. The maximal elongation is 8%. The total thickness is 310 microns.



DELIVERY PROGRAM

DUCT-TAPE is available in two different standard sizes: 50 and 75mm. The standard length, per roll, is 50m. Ordering code: **DUCT[width]**.

OPERATING TEMPERATURE

DUCT-TAPE is suitable for applications within the following range of temperature: -20 up to +75°C.

The processing has to take place between +5 and +30°C

OPERATING PRESSURE

DUCT-TAPE is suitable for processing until an over pressure of: +1500Pa.

ADHESION

The adhesion is 0.55kg/cm if the surface is fat-free and dust-free. The ultimate tensile failure is 5.9kg/cm.

STORAGE

DUCT TAPE has a lifespan of one year at room temperature, if the packaging is sealed.

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.

Version 2003. WWW.DECINTERNATIONAL.COM