

Dehumidifier RECUSORB DR-010B

Dehumidifying capacity
at 20°C / 60%RH


0.5 kg/h

Dry air flow

190 m³/h




- Washable rotor
- No desiccant carry-over
- Stainless steel chassis
- Self-regulating heater
- Easy to maintain
- Long lifetime

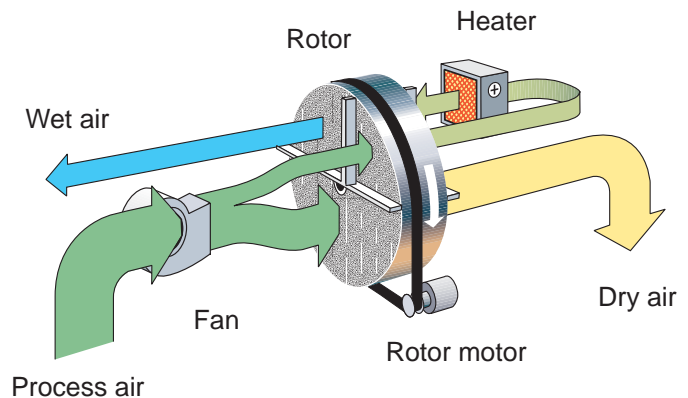



Contains the SSCR rotor -
one step ahead in
adsorption technology

The high number of channels
means that moisture is adsorbed
with extra efficiency!



Dehumidifier model	DR-010B
Nominal capacity *	0.5 kg/h
Dry airflow**	190 m ³ /h
Wet air flow **	40 m ³ /h
Heater current***	3 A / 690W
Maximum electric consumption	0.8 kW
Supply fuse 230V / 50Hz	10 A
Weight	12 kg

- * Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.
- ** Volume flow for density 1.20 kg/m³. Free blowing
- *** Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

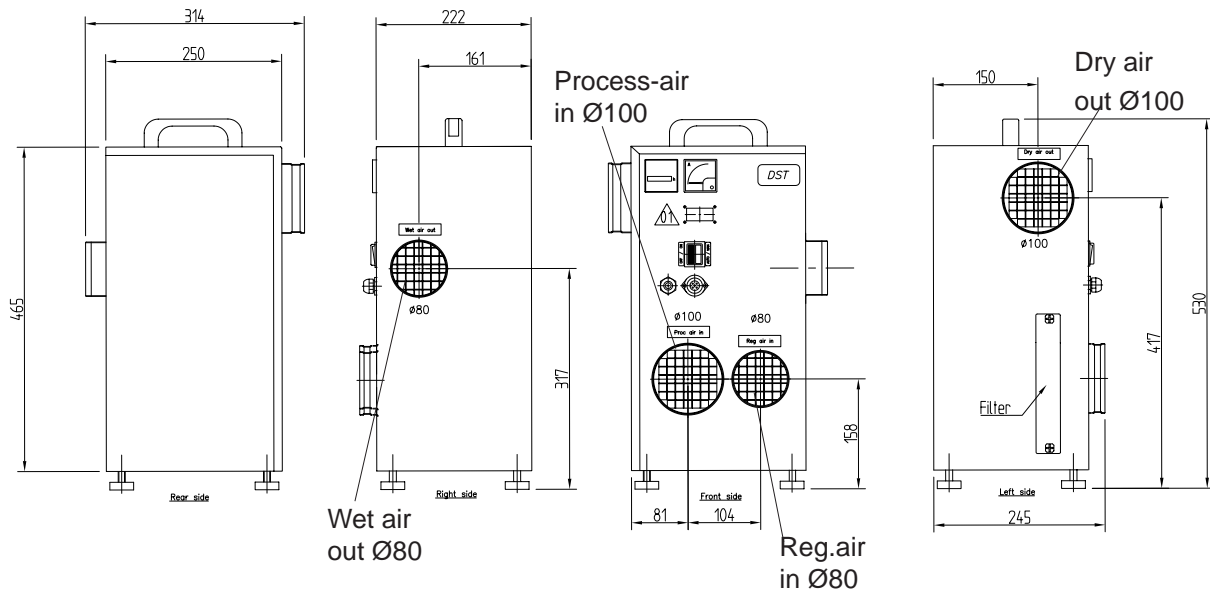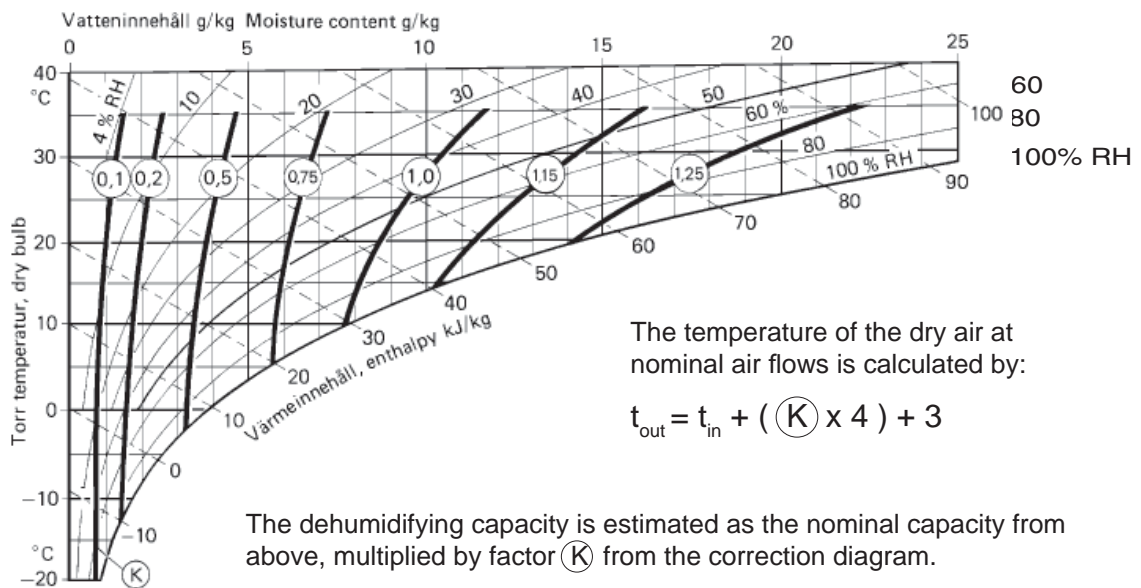

Subject to change without notice.
 Download installation drawing at www.dst-sg.com

[mm]