

# Dehumidifier RECUSORB DR-010B MH1

Dehumidifying capacity  
at 20°C / 60%RH

**0.5 kg/h**


Dry air flow

**190 m<sup>3</sup>/h**

**With humidistat**  
Only for installations  
where the unit is  
installed in the  
dehumidified room




- Built in humidistat
- Washable rotor
- No desiccant carry-over
- Self-regulating heater
- Easy to maintain
- Long lifetime

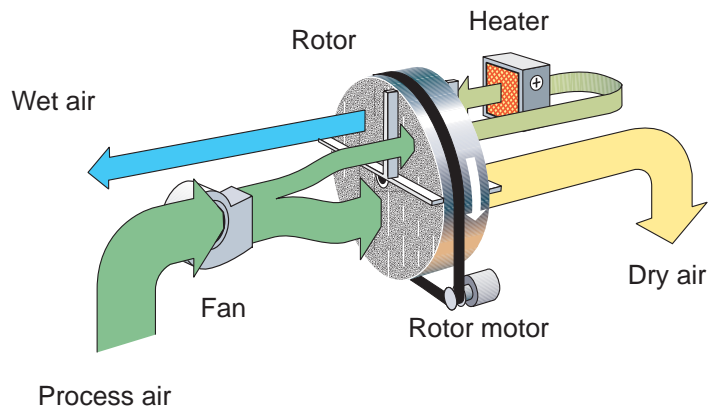

Contains the SSCR rotor -  
one step ahead in  
adsorption technology

The high number of channels  
means that moisture is adsorbed  
with extra efficiency!





Dehumidifier model	DR-010B MH1
Nominal capacity *	0,5 kg/h
Dry airflow**	190 m <sup>3</sup> /h
Wet air flow **	40 m <sup>3</sup> /h
Heater current***	3 A / 690W
Maximum electric consumption	0,8 kW
Supply fuse 230V / 50Hz	10 A
Weight	12 kg

\* Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.

\*\* Volume flow for density 1.20 kg/m<sup>3</sup>. Free blowing

\*\*\* Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

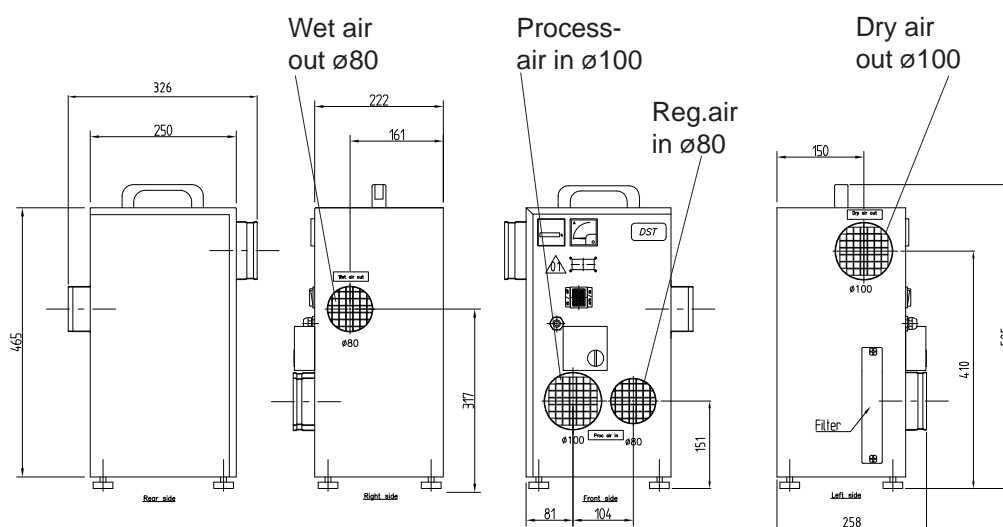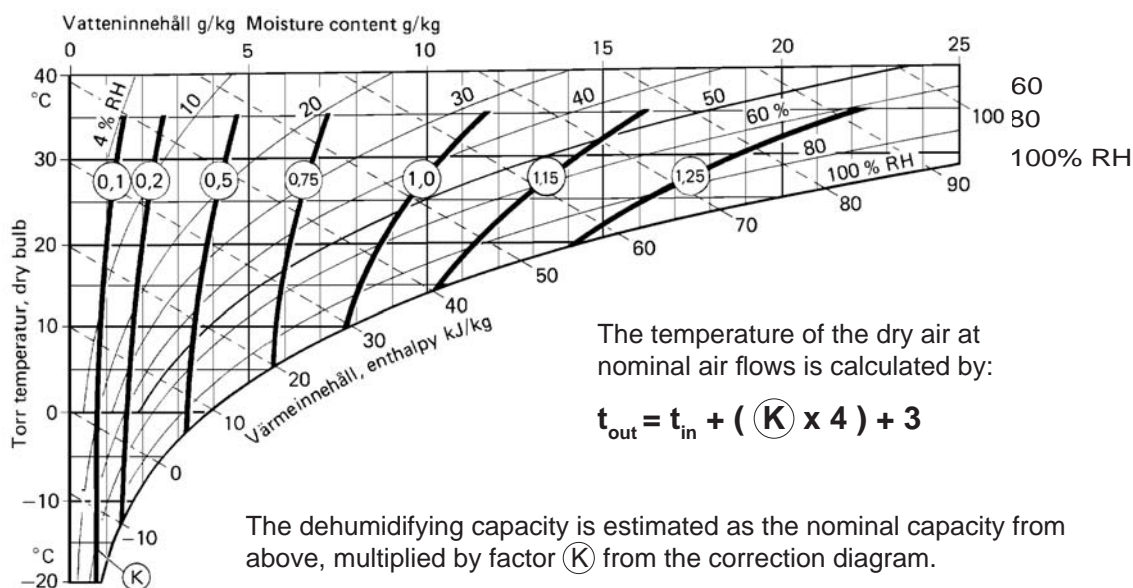

Subject to change without notice.  
Download installation drawing at [www.dst-sg.com](http://www.dst-sg.com)

Seibu Giken DST AB  
Avestag, 33, S-163 53 Spånga, Sweden  
tel: 08-4457720; fax: 08 -4457739  
[www.dst-sg.com](http://www.dst-sg.com) E-mail: [info@dst-sg.com](mailto:info@dst-sg.com)

Representative: