
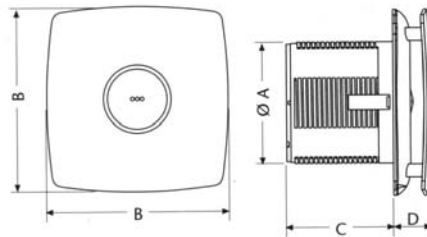


**EXTRACTORES AXIALES DE BAÑO**  
**AXIAL BATHROOM EXTRACTORS**

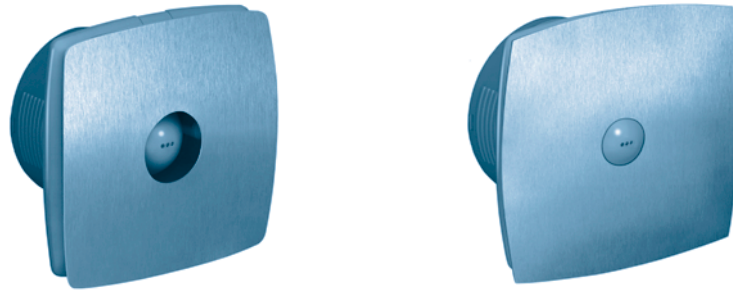

**SÉRIE DE LUXE**  
**LUXE RANGE**



**DIMENSIONES / DIMENSIONS / ENCOMBREMENT / ABMESSUNGEN (mm)**

Model	ØA	B	C	D
X-MART 10 STANDARD	98	150	89,5	31
X-MART 10 TIMER	98	150	89,5	31
X-MART 12 STANDARD	118	170	103,5	32
X-MART 12 TIMER	118	170	103,5	32
X-MART 15 STANDARD	148	194	123,5	34
X-MART 15 TIMER	148	194	123,5	34
X-MART 10 INOX	98	150	89,5	31
X-MART 10 INOX T	98	150	89,5	31
X-MART 12 INOX	118	170	103,5	32
X-MART 12 INOX T	118	170	103,5	32
X-MART 15 INOX	148	194	123,5	34
X-MART 15 INOX T	148	194	123,5	34



**SERIE MONOFÁSICA / SINGLE PHASE / SÉRIE MONOPHASÉE / EINPHASIG**

Model	Kw	R.P.M max.	Q. max. R.P.M max.	Ps mmH2O	Kg	Diametro mm
X-MART 10 STANDARD	15	2.500	98	3	0,64	100
X-MART 10 TIMER	15	2.500	98	3	0,64	100
X-MART 10 INOX	15	2.500	98	3	0,66	100
X-MART 10 INOX T	15	2.500	98	3	0,66	100
X-MART 12 STANDARD	20	2.450	190	5	0,84	120
X-MART 12 TIMER	20	2.450	190	5	0,84	120
X-MART 12 INOX	20	2.450	190	5	0,87	120
X-MART 12 INOX T	20	2.450	190	5	0,87	120
X-MART 15 STANDARD	25	2.100	320	8	1,02	150
X-MART 15 TIMER	25	2.100	320	8	1,02	150
X-MART 15 INOX	25	2.100	320	8	1,04	150
X-MART 15 INOX T	25	2.100	320	8	1,04	150

**EXTRACTORES AXIALES DE BAÑO**  
**AXIAL BATHROOM EXTRACTORS**

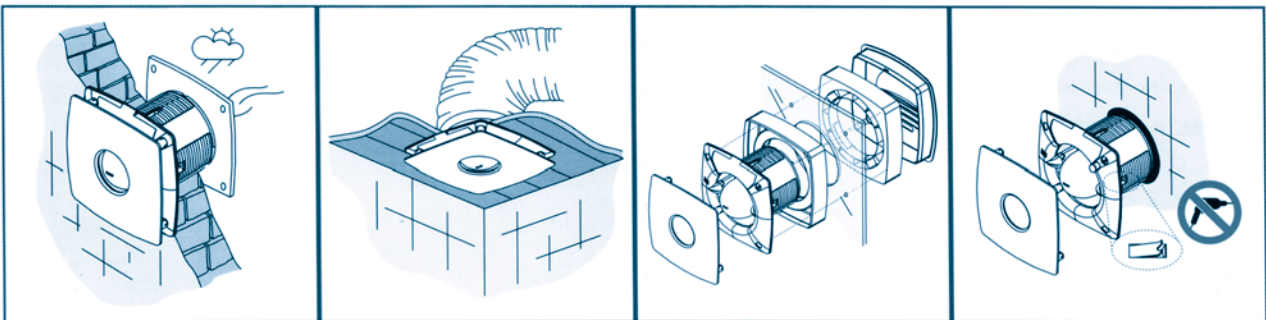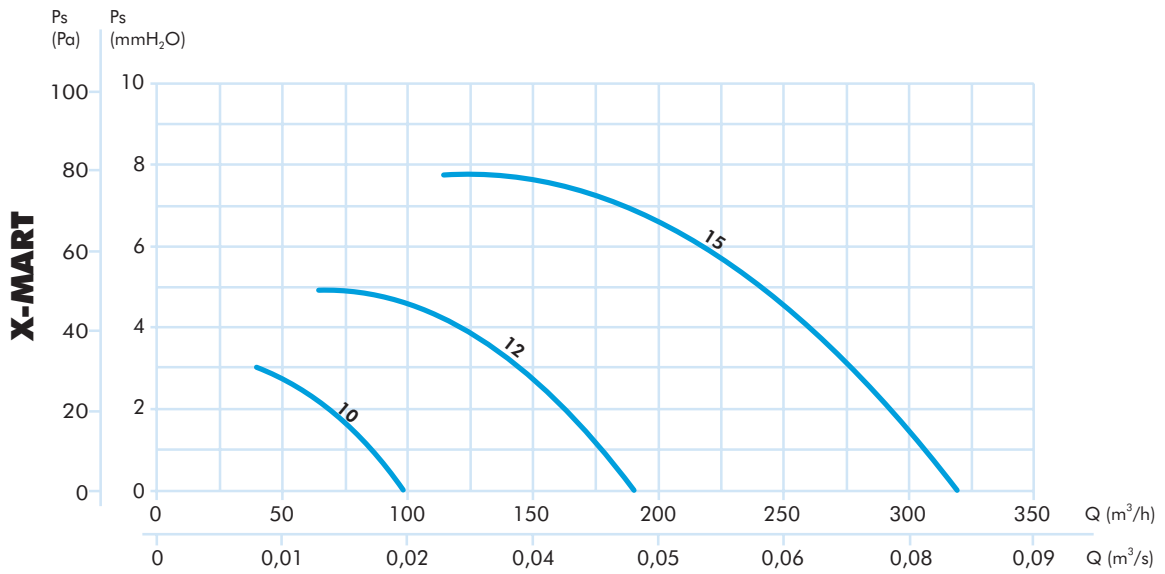

**EXTRACTORES DE COCINA**  
**KITCHEN HOOD FANS**

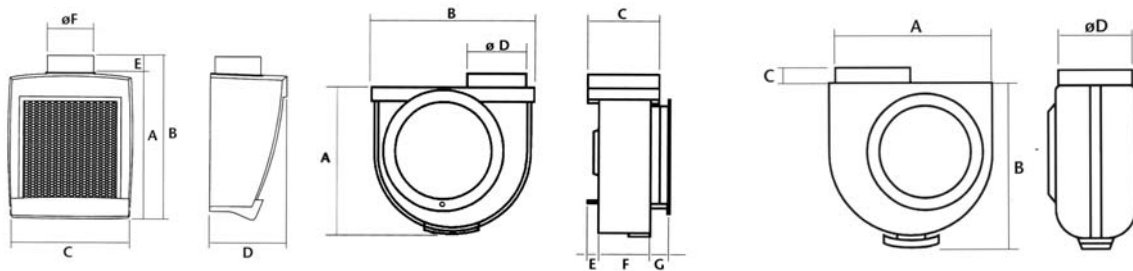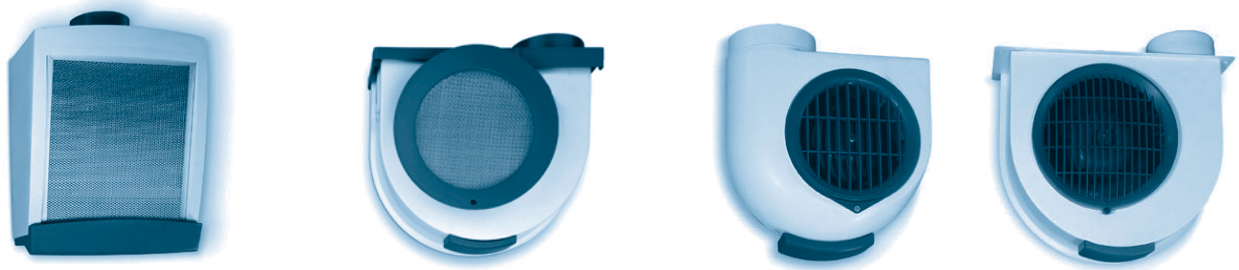

**DIMENSIONES / DIMENSIONS / ENCOMBREMENT / ABMESSUNGEN (mm)**

Model	A	B	C	D	E	ØF	G
ASPCENTRIFUGO, 600 PLUS 2 VEL.	312	355	127	118	26	88	20

Model	A	B	C	D	E	ØF
ASPCENTRIFUGO, PROFESSIONAL 500	330	370	280	173	40	98

Model	A	B	C	ØD
ASPCENTRIFUGO, GS-400 P	240	230	25	110

Model	A	B	C	ØD	E	F	G
ASPCENTRIFUGO, GS-600	310	375	124	110	26	90	20

**EXTRACTORES DE COCINA**  
**KITCHEN HOOD FANS**

**SERIE MONOFÁSICA / SINGLE PHASE / SÉRIE MONOPHASÉE / EINPHASIG**

Model	Kw	R.P.M max.	Q. max. R.P.M max.	Ps mmH2O	dB (A)	Kg
ASP.CENTRIFUGO, PROFESSIONAL 500	150	1.900	450	35	57	2,09
ASP.CENTRIFUGO, 600 PLUS 2 VEL.	105	1.185	420/600	21/23	52	4
ASP.CENTRIFUGO, GS-400 P	60	2.200	290	23	52	2,02
ASP.CENTRIFUGO, GS-600	105	1.180	480	22	50	4,8

