

Complete Fumex range of exhaust nozzles for vehicle exhaust fumes.



Oval rubber nozzle, AGO & AGOS


AGO and AGOS rubber nozzle with oval connection, can be connected to single or double exhaust pipes, up to 70 × 150 mm. Can be affixed using a grip, clip or strap; dual outlet has a diameter of 22 mm.

- **AGO** without damper
- **AGOS** with tight-sealed damper

Temp. range: -30 °C to +150 °C
Weight: approx. 1 kg

Item Number	A	B
	oval	mm
AGO-075(X)*	150 × 85	75
AGO-100(X)*	150 × 85	100
AGO-125(X)*	150 × 85	125
AGO-075(X)*	150 × 85	75
AGO-100(X)*	150 × 85	100
AGO-125(X)*	150 × 85	125

* (X) T = Grip K = Clamp S = Strap

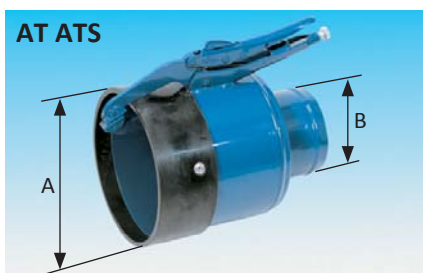

Grip nozzle, AT & ATS

Grip nozzle with round opening. Powder coated steel. Rubber impact protector. Supplied with dual outlet

- **AT** without damper
- **ATS** with tight-sealed damper

Temp. range: -30 °C to +200 °C
Weight: 1.75–2.25 kg

Item Number	A mm	B mm
AT/ATS 125-100	125	100
AT/ATS 125-125	125	125
AT/ATS *160-100	160	100
AT/ATS *160-125	160	125
AT/ATS *160-150	160	150
AT/ATS *160-160	160	160

* not dual outlet



Stacker nozzle, AHM

Made from electrogalvanised steel. Complete with lifting handle and impact protection. Rubber funnel in reinforced rubber cloth.

Temp. range: -30 °C to +150 °C
Weight: approx. 8 kg

Y-shaped hose end, AGK

Branch connection for double exhaust pipes. The branch pipe is made from electrogalvanised steel.

AG hose: Flame-retardant, crushable, suitable for vehicle exhaust fumes. Complete with hose clamps. 1m hose per branch.

Item No.	A mm	B mm
AHM -100	250	100
AHM -125	250	125
AHM -160	250	160

Item No.	A mm
AGK -075	75
AGK -100	100
AGK -125	125

The Fumex range also includes fans, accessories and filters suitable for extractor points

Pneumatic rubber sleeve, APM/APMO

The pneumatic nozzle is connected to the exhaust pipe by blowing compressed air into the sleeve which fixes to the pipe.
Temp. range: -30 °C till +150 °C (APM), +200 °C (APMO). Max air pressure to sleeve: 0.8 bar.

Round nozzle



For automatic disconnection

Sleeve in reinforced EPDM rubber. Complete with 45° pipe curve in metal, 0.75 m hose, slide valve, quick disconnect valve and ASK hose break protector.

For fixing to rail solutions, the nozzle is supplemented with a compressed air unit, see the relevant leaflet. Approx. weight 3 kg.

For manual disconnection

Sleeve in reinforced EPDM rubber. Complete with 45° pipe curve in metal, 0.75 m hose and slide valve.
For fitting to ASR/ASRM hose roll or ASA balancing block solution, the nozzle is supplemented with a APM 810 compressed air unit containing compressed air hose with swivel and pressure regulator. For fitting to rail solutions, see the relevant leaflet.

Item No.	A mm	B mm
APM 811A	100	75
APM 812A	100	100
APM 813A	125	100
APM 814A	125	125
APM 815A	160	100
APM 816A	160	125
APM 817A	160	150
APM 818A	200	150
Item No.	A mm	B mm
APM 811M	100	75
APM 812M	100	100
APM 813M	125	100
APM 814M	125	125
APM 815M	160	100
APM 816M	160	125
APM 817M	160	150
APM 818M	200	150

Oval nozzle



For automatic disconnection

Kevlar reinforced sleeve in EPDM rubber. Complete with integrated 45° bend in rubber, with metal reinforcing rings, 0.75 m hose, slide valve, quick disconnect valve and ASK hose break protector.

For fixing to rail solutions, the nozzle is supplemented with a compressed air unit, see the relevant leaflet. Approx. weight 3.5 kg.

For manual disconnection

Kevlar reinforced sleeve in EPDM rubber. Complete with integrated 45° bend in rubber, with metal reinforcing rings, 0.75 m hose and slide valve.

APM 812MC complete with CO tube 6mm quick connection. For fitting to ASR/ASRM hose roll or ASA balancing block solution, the nozzle is supplemented with a APM 810 compressed air unit containing compressed air hose with swivel and pressure regulator. For fitting to rail solutions, see the relevant leaflet.

Item No.	A oval	B mm
APMO 812A	200 × 100	100

Item No.	A oval	B mm
APMO 812M	200 × 100	100
APMO 812MC*	200 × 100	100

*complete, CO tube with 6 mm quick connection.

ASK hose break protection



Shock-resistant, manufactured in EPDM rubber with stainless steel reinforcing rings. Protects the hose against heavy loads without the hose, nozzle or vehicle being damaged.

Temp. range: -30 °C till +150 °C
Weight: 1 kg

Item No.	Ø mm
ASK 100	100
ASK 125	125
ASK 150	150