


DIFFUSER WITH PERFORATED PLATE FOR SUPPLY DA340T • DA360T


Installation dimensions

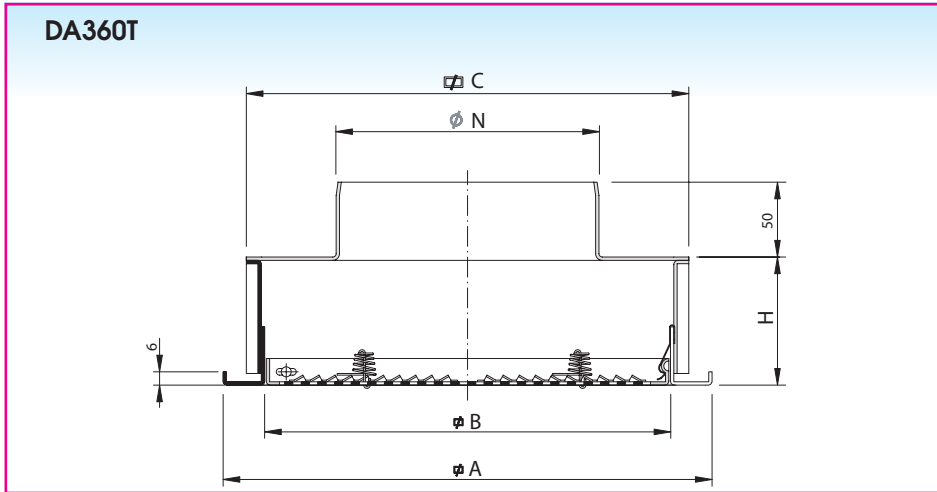

DA360 T

Size	Ø N	□ A	□ B	C	H
160	158	294	244	255 x 248	80
200	198	394	344	355 x 348	80
250	248	494	444	455 x 448	80
315	313	594	544	555 x 548	80

All dimensions in mm.

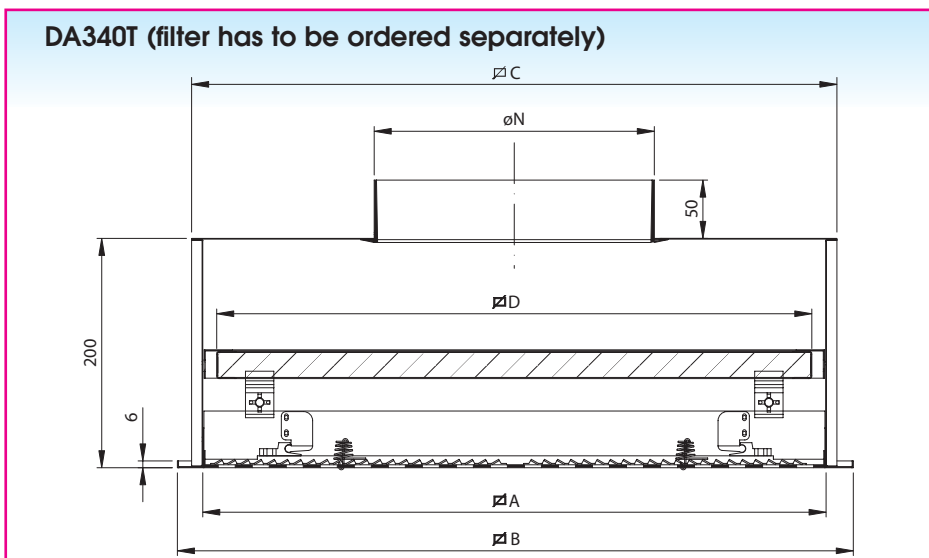

DA 340 T

Size	Ø N	□ A	□ B	□ C	□ D
160	158	244	294	266 x 248	230x230x22
200	198	344	394	366 x 348	330x330x22
250	248	444	494	466 x 448	430x430x22
315	313	544	594	566 x 548	530x530x22


All dimensions in mm.



Application

The diffuser type DA340/360 is used for the supply of cooled or heated air in facilities such as offices, shopping centres and where simple adjusting of the air pattern is required without influencing air quantity or pressure loss. The diffuser can be mounted in the ceiling and has an adjustable air pattern in 1, 2, 3 or 4 directions.

Adjusting possibilities:

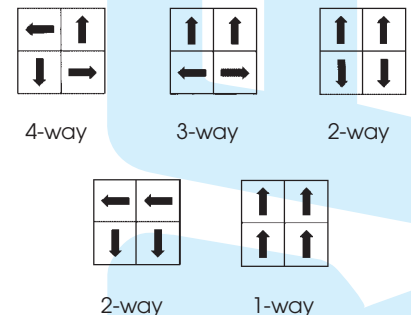

Technical information

Characteristics :

- Available with push-pull lock or clips lock
- The perforated plate is mounted in the frame with hinges for access.
- Standard construction is a 4-way air pattern.
By changing the deflector plates, an air pattern in 3, 2 or 1 direction can be obtained.

Construction:

- diffuser: steel, painted white (RAL 9010)
- deflector plates : steel, painted black (RAL 9005)
- plenum : galvanised sheet steel

Specifications description


Example:

Square steel supply diffuser with clips lock and with 4 adjustable deflector plates and circular top entry spigot. The diffuser is painted white (RAL 9010)

Type: DA360T
size ... mm

Accessories

- **DT003:** Damper with several radial opposed segments. Adjustable through the diffuser after opening the hinged perforated plate. Construction out of sheet steel and painted black (RAL 9005).

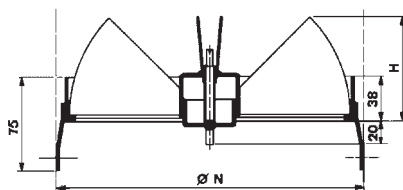

Size	Ø N	H
160	158	55
200	198	69
250	248	89
315	313	109

All dimensions in mm.

Fixing

- **DA340/360T:** Concealed fixing with screws in the top collar. Ceiling mounting in a T-profile is also possible.

How to order

DA360T size 315 x 594 mm with damper type DT003 size 315 mm.

a) Diffuser

D	A	3	6	0	T	-	0	3	1	5	0	5	9	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Size Dimension A

- : non insulated plenum
G: insulated plenum

- : diffuser only without plenum
T: diffuser and plenum with top entry

DA340: diffuser with push-pull lock
DA360: diffuser with clips lock

b) Damper

D	T	0	0	3	-	-	0	3	1	5	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Size

Possible deliveries

- **DA340:** diffuser with push-pull lock
- **DA360:** diffuser with clips lock
- **DA340T:** diffuser with push-pull lock and top entry, with filterframe
- **DA360T:** diffuser with clips lock and top entry
- **DA340P:** Steel modular plate for false ceiling mounting with push-pull lock : dimensions 594 x 594 mm Painted white (RAL9010) For further information, see p. 2 501
- **DA360P:** Steel modular plate for false ceiling mounting : dimensions 594 x 594 mm Painted white (RAL 9010) For further information, see p. 2 501
- **DA340TG:** DA340T with insulated plenum
- **DA360TG:** DA360T with insulated plenum