


# SUPPLY AIR VALVE DVLI

## TECHNICAL DATA


### MECHANICAL PROPERTIES

- Diameters 080,100,125,160 and 200mm
- Max 100 ° C
- Manufactured from white polypropylene (Ral 9003)
- High valve body improving air flow/less noise
- No leakage between valve body and connection bush
- Variable volume flow control
- Suitable for rooms with a high air humidity (e.g. kitchen, bathroom)

DVLI 80 – 125

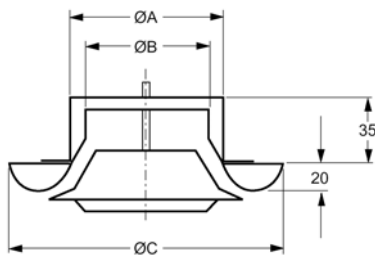


DVLI 160 – 200

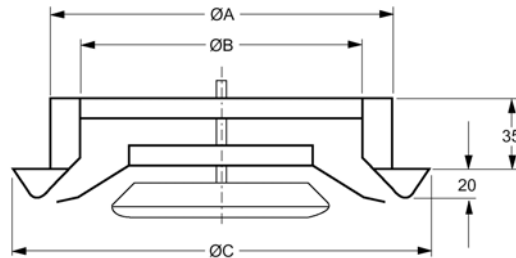

### DIMENSIONS in mm

Art. Code	A	B	C	Weight
DVLI -080	80 mm	46 mm	118 mm	0.09kg
DVLI -100	100 mm	80 mm	150 mm	0.15kg
DVLI -125	125 mm	96 mm	158 mm	0.16kg
DVLI -160	160 mm	115 mm	195 mm	0.23kg
DVLI -200	200 mm	163 mm	240 mm	0.34kg



$a = 0 \pm$  mm  
 $n =$  number of revolutions open


Art. Code	Airflow l/s (m <sup>3</sup> /h) at sound level		
	25dB(A)	30dB(A)	35dB(A)
DVLI -080	8	11 (40)	13
DVLI -100	16	19 (68)	23
DVLI -125	20	24 (86)	28
DVLI -160	32	38 (137)	46
DVLI -200	57	70 (252)	85

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.


Version 2004 [www.decinternational.com](http://www.decinternational.com)

# SUPPLY AIR VALVE DVLI


## DVLI 80

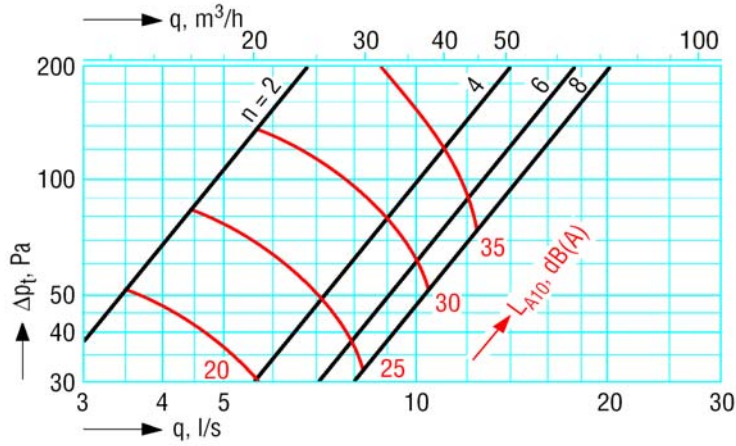

## DVLI 100

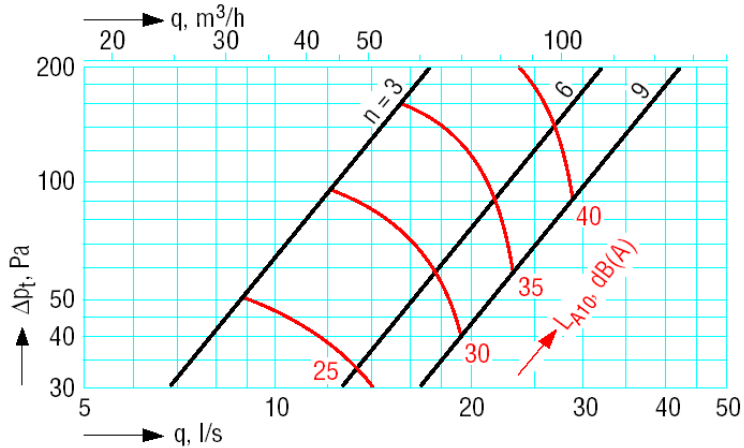

## DVLI 125

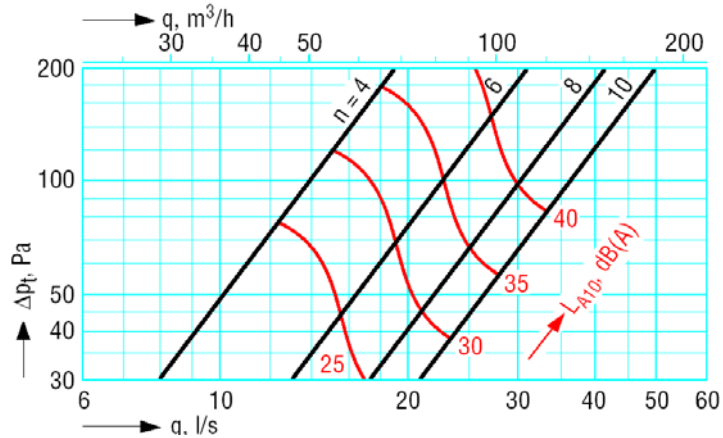


3.3b  
DVLI

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.


Version 2004 [www.decinternational.com](http://www.decinternational.com)

# SUPPLY AIR VALVE DVLI-160

**DVLI 160 inner slot closed**

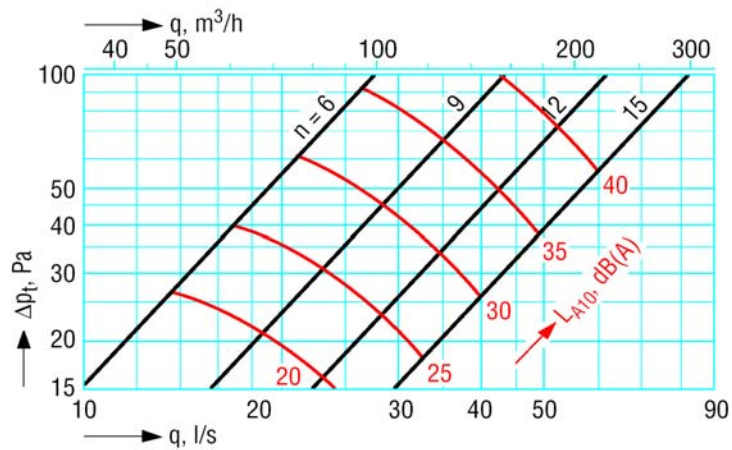

**DVLI 160 inner slot open 5 rev. (6.25mm)**

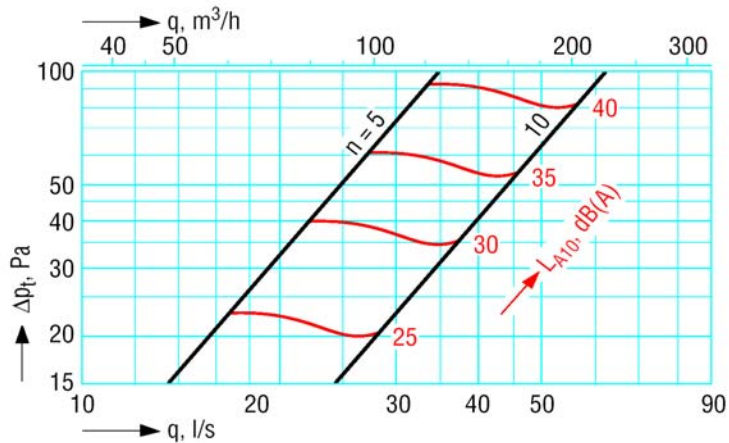


The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.


Version 2004 [www.decinternational.com](http://www.decinternational.com)

# SUPPLY AIR VALVE DVLI-200

**DVLI 200 inner slot closed**

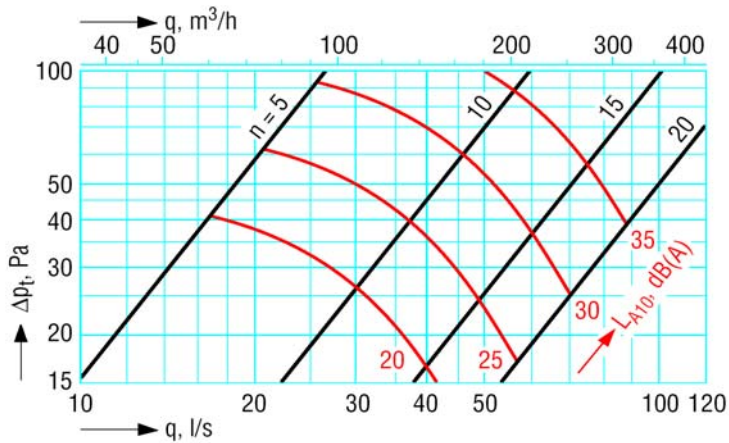

**DVLI 200 inner slot open 8 rev. (10mm)**

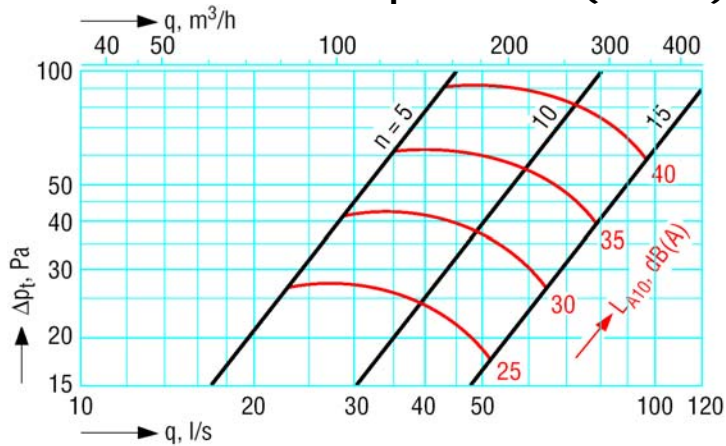

3.3b

DVLI

The information contained in this brochure was current on the publication date. The Company reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact the Company checking for any changes in materials and/or information after this brochure was published.

Version 2004 [www.decinternational.com](http://www.decinternational.com)